



输入COM端子必须接0V

DC24V
供电

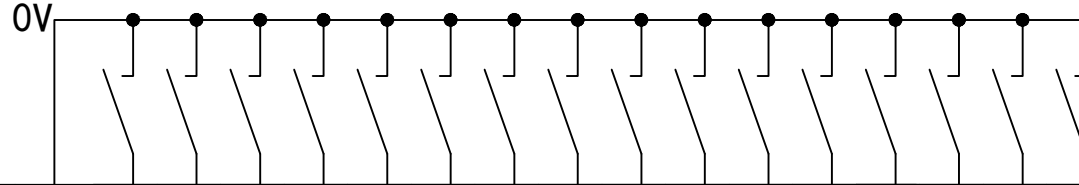

↓ ↓
DC输入

↑ ↑
DC输出

传感器型号:NPN

RS485

TX2N-30MR

RS422
下载口

